


FISHER® XBLADE™

You won't find a commercial or municipal use snowplow built any tougher than this.

- Xtreme 31" blade height plows through the deepest snow.
- Xtreme 75° attack angle for better ice breaking and scraping.
- Xtreme blade curl and 10" moldboard "overhang" promotes optimum snow rolling and "foiling" action to keep plowed snow off the windshield.
- Exclusive X-BRACING provides superior torsional strength and rigidity to eliminate moldboard stress.
- Polished stainless steel moldboard is bolted on top with stainless steel fasteners and mechanically interlocked on bottom to a powder coated steel structure for a truly rust free snowplow blade. Poly moldboard is also available (8' and 9' only).
- Contains 1" base angle pins for added strength, and longer life.
- Higher vertical compression spring attachment location for increased ground clearance and wear resistance.

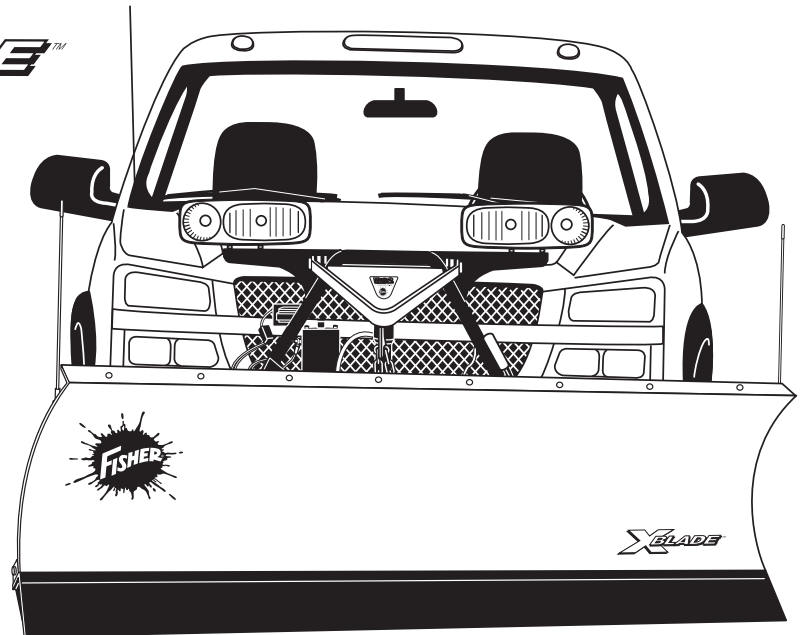

- Xtreme "double angle" base angle design provides superior strength and rigidity to eliminate stress.
- Optional 6" center punched reversible cutting edge helps increase wear resistance and promote increased base angle life.
- Optional combination wear and curb shoe helps reduce blade wear especially when scraping against curbs.
- Optional 2 ply rubber deflector available to keep snow in front of the blade and off your windshield and away from the radiator.

| Model | Plow Type | Blade Width | Blade Height | Blade Gauge | Trip Springs | Ribs | Angling Rams | Plowing Width (full angle) | Approx. Weight Complete | Wear Shoes (cast iron) | Optional Cutting Edge |
|-----------|--------------|-------------|--------------|-------------|--------------|------|--------------|----------------------------|-------------------------|------------------------|-----------------------|
| 7'6" XBLD | Extreme Duty | 7'6" | 31" | 14 | 4 | 10 | 1 1/2" x 12" | 6'7" | 742#** | optional | 1/2" x 6" |
| 8' XBLD | Extreme Duty | 8' | 31" | 12* | 4 | 10 | 1 1/2" x 12" | 7'1" | 790#** | optional | 1/2" x 6" |
| 8'6" XBLD | Extreme Duty | 8'6" | 31" | 12 | 4 | 10 | 1 1/2" x 12" | 7'6" | 813#** | optional | 1/2" x 6" |
| 9' XBLD | Extreme Duty | 9' | 31" | 12* | 4 | 10 | 1 1/2" x 12" | 7'11" | 835#** | optional | 1/2" x 6" |

* Available with stainless steel or poly moldboards ** Plus Vehicle Mount – average 60#

All plows include the INTENSIFIRE™ low-profile, dual beam halogen headlamps with combination park/turn signal lights that conform to federal safety standards and E-Force Isolation Module for improved long term performance of the light system. Vehicle light switch activates plow lights – no separate in-cab switch is needed.



FISHER ENGINEERING • 50 GORDON DRIVE • ROCKLAND, MAINE 04841 • www.fisherplows.com

